



# Portion Control Scale

## PPC SERIES

Model:  
**PPC-5/10**  
**PPC-10/20**



### Product features

- Available in 10, and 20 lb capacity
- Toggles between kg and lb
- Robust stainless steel case and plate
- 100 hour rechargeable battery
- Progressive tare
- RS-232 Data Port
- Extensible cable cord for remote operation
- LCD Display with backlight
- Class III accuracy

### Product highlights



Foot pedal for handsless operation



Remote indicator module



Toggles between kg and lb

### Certifications



### Warranty






# Portion Control Scale

## PPC SERIES

### Dimensions

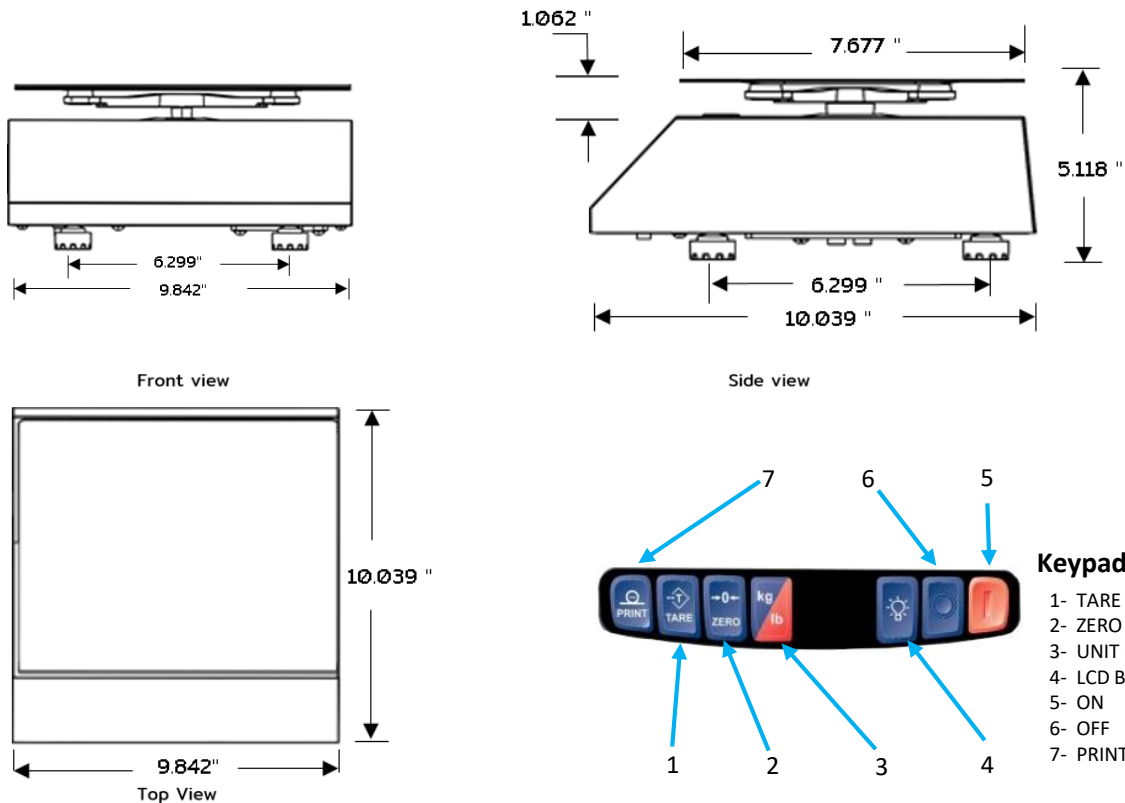

### Technical specifications

#### Dimensions

<b>External dimensions</b>	W: 10.039" D: 9.842" H: 5.118"
<b>Packaging dimensions</b>	W: 14.173" D: 13.976" H: 11.811"
<b>Gross weight</b>	7.385 lb.
<b>Shipping Weight</b>	10.912 lb.
<b>Plate dimensions</b>	W: 7.677" D: 9.842" H: 1"

#### Construction

<b>Scale Construction</b>	Food grade stainless steel
<b>Platform Construction</b>	Food grade stainless steel
<b>Plate holder material</b>	High strength reinforced plastic
<b>Leveling feet</b>	4

#### Logistic data

<b>Units per pallet</b>	45
<b>Weight per pallet</b>	531 lb.
<b>Dim. per pallet</b>	44.883" X 48.031" X 64.566"

#### Electrical data

<b>Power supply</b>	110/220VAC - 9VDC 500mA
<b>Battery</b>	Rechargeable Battery 6V, 950mA/h
<b>Battery Life</b>	100 Hours (no backlight) Aprox 6 Hours (Suspend mode)
<b>Charging time</b>	12 Hours
<b>Display</b>	LCD with Backlight

#### Performance data

<b>Capacity</b>	10 lb / 20 lb
<b>Minimal division</b>	0.002 lb / 0.005 lb
<b>Maximum tare</b>	10 lb / 20 lb
<b>Operation temperature</b>	14°F to 104°F (-10°C to 40°C)
<b>Storage temperature</b>	-4°F to 122°F (-20°C to 50°C)

#### Additional data

<b>Foot pedal dimensions</b>	W: 2.63" D: 4.015" H: 1.05"
<b>Foot pedal cord length</b>	83"
<b>Communication</b>	Serial RS-232
<b>Accuracy Class</b>	III
<b>Warranty</b>	1 year